

# YY-CDD-SF72

插地灯




## 材质结构 / Material structure

- 材 质: ADC12压铸铝, 独特设计的散热器具具有: 传热快, 散热好, 保证光源光衰小, 寿命更长
- 表面处理: 静电喷塑, 可定制颜色
- 光学部分: 二次光学透镜配光, 多角度可选, 钢化玻璃防护, 防眩设计, 光斑均匀, 出光效率更高
- 密封结构: 灌胶防水, 防护等级IP65
- 安装方式: 钣金支架平面安装, 可旋转结构设计, 安装简易, 使用范围广, 对施工要求不高
- 连接方式: 工业耦合器手挽手连接或橡胶线伸出连接
- 可 选 项: 可内置防眩光网, 遮光罩可选装

Material: ADC12 die cast aluminum, uniquely designed heat sink with fast conduction, good heat dissipation, ensuring minimal light attenuation and longer lifespan of the light source  
 Surface treatment: electrostatic spraying, customizable colors  
 Optical part: Secondary optical lens distribution, multiple angle options, tempered glass protection, anti glare design, uniform light spot, higher light output efficiency  
 Sealing structure: Glue filled waterproof, protection level IP65  
 Installation method: Sheet metal bracket flat installation, rotatable structural design, easy installation, wide range of use, low construction requirements  
 Connection method: Industrial coupler arm in arm connection or rubber wire extension connection  
 Optional: Built in anti glare mesh, optional light shield

## 配光曲线 / Custom

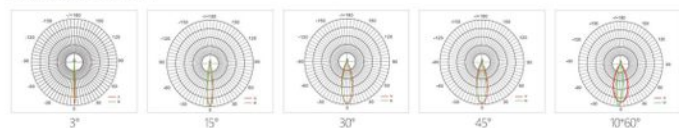

YY-CDD-SF06 YY-CDD-SF18 YY-CDD-SF36 YY-CDD-SF54 YY-CDD-SF72

## 产品参数 / Product parameters

产品型号	YY-CDD-SF72	Product Model	YY-CDD-SF72
光源品牌	OSRAM/CREE	LED Brand	OSRAM/CREE
控制方式	开关控制	Control Mode	ON/OFF
可选功率	3W-72W	Power	3W-72W
输入电压	AC85-268V	Voltage	AC85-268V
发光颜色	单色	Color	2000K-6500K/R/G/B
显色性	Ra > 80	CRI	Ra > 80
平均寿命	50000H	Service Life	50000H
材 质	铝材+钢化玻璃	Material	Aluminum+Tempered glass
防护等级	IP65	Ingress Protection	IP65

## 产品尺寸 / Product size

型号/Model	功率/Power	色温/K	Unit:mm(±2mm)		
			直径/φ	宽/W	高/H
YY-CDD-SF06	3W/6W	1800K-3600K	85	135	430
YY-CDD-SF18	12W/18W	1800K-3600K	125	190	500
YY-CDD-SF36	24W/36W	1800K-3600K	165	250	530
YY-CDD-SF54	48W/54W	1800K-3600K	190	260	570
YY-CDD-SF72	72W	1800K-3600K	230	280	600



## 灯具颜色 / Custom



## 发光颜色 / Custom

