

YY-TGD-CX230

投光灯




材质结构 / Material structure

- 材 质: ADC12压铸铝, 独特设计的散热器具有: 传导快, 散热好, 保证光源光衰小, 寿命更长
- 表面处理: 静电喷塑, 可定制颜色
- 光学部分: 二次光学透镜配光, 多角度可选, 钢化玻璃防护, 防眩设计, 光斑均匀, 出光效率更高
- 密封结构: 灌胶防水, 防护等级IP66
- 安装方式: 钣金支架平面安装, 可旋转结构, 安装简易, 使用范围广, 对施工要求不高
- 连接方式: 工业耦合器手挽手连接或橡胶线伸出连接
- 可 选 项: 可内置防眩光网, 遮光罩可选装

Material: ADC12 die cast aluminum, uniquely designed heat sink with fast conduction, good heat dissipation, ensuring minimal light attenuation and longer lifespan of the light source
 Surface treatment: electrostatic spraying, customizable colors
 Optical part: Secondary optical lens distribution, multiple angle options, tempered glass protection, anti glare design, uniform light spot, higher light output efficiency
 Sealing structure: Glue filled waterproof, protection level IP66
 Installation method: Sheet metal bracket flat installation, rotatable structural design, easy installation, wide range of use, low construction requirements
 Connection method: Industrial coupler arm in arm connection or rubber wire extension connection
 Optional: Built in anti glare mesh, optional light shield

配光曲线 / Custom

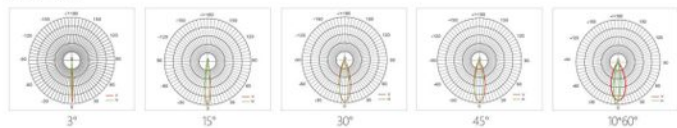

耀耀 - 以品质提升价值



YY-TGD-CX115

YY-TGD-CX135

YY-TGD-CX160

YY-TGD-CX190

YY-TGD-CX230

产品参数 / Product parameters

产品型号 YY-TGD-CX230
 光源品牌 OSRAM/CREE
 控制方式 单色静态/DMX512
 可选功率 9W-48W
 输入电压 AC85-268V/DC24V
 发光颜色 单色/RGB
 显色性 Ra > 80
 平均寿命 50000H
 材 质 铝材+钢化玻璃
 防护等级 IP66

Product Model YY-TGD-CX230
 LED Brand OSRAM/CREE
 Control Mode ON/OFF /DMX512
 Power 9W-48W
 Voltage AC85-268V/DC24V
 Color 单色/RGB
 CRI Ra > 80
 Service Life 50000H
 Material Aluminum+tempered glass
 Ingress Protection IP66

可定制 / Custom



产品尺寸 / Product size

型号/Model	功率/Power	色温/K	Unit:mm(±2mm)		
			长/L	宽/W	高/H
YY-TGD-CX115	9W/12W	1800K-3600K/RGB	115	115	140
YY-TGD-CX135	18W	1800K-3600K/RGB	135	135	170
YY-TGD-CX160	24W	1800K-3600K/RGB	160	160	200
YY-TGD-CX190	36W	1800K-3600K/RGB	190	190	235
YY-TGD-CX230	48W	1800K-3600K/RGB	230	230	285

